

## Bipolare Pinzetten Standard

*Bipolar forceps standard*


- Für HF- und RF-Generatoren geeignet  
*Applicable for HF- and RF-generators*

- Hochwertige Isolation  
*Valuable insulation*

- Europäischer Flachstecker / Führungsstift  
*European flat plug / guiding pin*



**CE** 0483

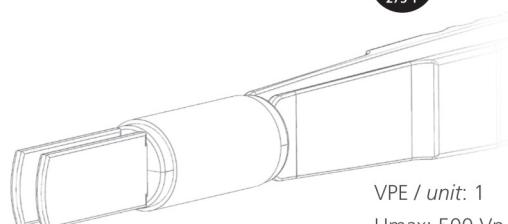

Spitzenlänge / Tip length = L2



| Spitzenbreite   tip width      | Nadel / Needle | 0.5 mm       | 1.0 mm       | 2.0 mm       | 2.0 mm Karo  |
|--------------------------------|----------------|--------------|--------------|--------------|--------------|
|                                |                |              |              |              |              |
| <b>Artikel-Nr.   item code</b> | -              | -            | <b>95042</b> | -            | -            |
| <b>L1</b>                      | -              | -            | 145 mm       | -            | -            |
| <b>L2</b>                      | -              | -            | 8 mm         | -            | -            |
| <b>Artikel-Nr.   item code</b> | <b>95036</b>   | <b>95013</b> | <b>95014</b> | -            | -            |
| <b>L1</b>                      | 165 mm         | 165 mm       | 165 mm       | -            | -            |
| <b>L2</b>                      | 6 mm           | 8 mm         | 8 mm         | -            | -            |
| <b>Artikel-Nr.   item code</b> | <b>95187</b>   | <b>95089</b> | <b>95090</b> | <b>95088</b> | -            |
| <b>L1</b>                      | 180 mm         | 180 mm       | 180 mm       | 180 mm       | -            |
| <b>L2</b>                      | 6 mm           | 8 mm         | 8 mm         | 8 mm         | -            |
| <b>Artikel-Nr.   item code</b> | <b>95103</b>   | <b>95104</b> | <b>95001</b> | <b>95007</b> | <b>95058</b> |
| <b>L1</b>                      | 195 mm         | 195 mm       | 195 mm       | 195 mm       | 195 mm       |
| <b>L2</b>                      | 8 mm           | 8 mm         | 8 mm         | 8 mm         | 8 mm         |
| <b>Artikel-Nr.   item code</b> | <b>95128</b>   | <b>95122</b> | <b>95024</b> | <b>95125</b> | -            |
| <b>L1</b>                      | 225 mm         | 225 mm       | 225 mm       | 225 mm       | -            |
| <b>L2</b>                      | 8 mm           | 8 mm         | 8 mm         | 8 mm         | -            |

## Bipolare Pinzetten Standard

*Bipolar forceps standard*


- Für HF- und RF-Generatoren geeignet  
*Applicable for HF- and RF-generators*

- Hochwertige Isolation  
*Valuable insulation*

- Europäischer Flachstecker / Führungsstift  
*European flat plug / guiding pin*



**CE** 0483

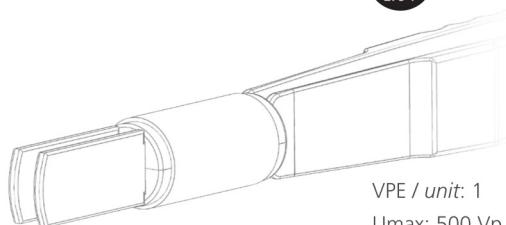

VPE / unit: 1  
Umax: 500 Vp

Spitzenlänge / Tip length = L2



Gesamtlänge / Total length = L1

| Spitzenbreite   tip width      | Nadel / Needle | 0.5 mm       | 1.0 mm       | 2.0 mm       | 2.0 mm Karo  |
|--------------------------------|----------------|--------------|--------------|--------------|--------------|
|                                |                |              |              |              |              |
| <b>Artikel-Nr.   item code</b> | <b>95116</b>   | <b>95017</b> | <b>95018</b> | -            | -            |
| L1                             | 165 mm         | 165 mm       | 165 mm       | -            | -            |
| L2                             | 6 mm           | 6 mm         | 6 mm         | -            | -            |
| <b>Artikel-Nr.   item code</b> | <b>95194</b>   | <b>95092</b> | <b>95091</b> | <b>95093</b> | -            |
| L1                             | 180 mm         | 180 mm       | 180 mm       | 180 mm       | -            |
| L2                             | 6 mm           | 6 mm         | 6 mm         | 8 mm         | -            |
| <b>Artikel-Nr.   item code</b> | <b>95008</b>   | <b>95109</b> | <b>95002</b> | <b>95034</b> | <b>95059</b> |
| L1                             | 195 mm         | 195 mm       | 195 mm       | 195 mm       | 195 mm       |
| L2                             | 6 mm           | 6 mm         | 6 mm         | 8 mm         | 8 mm         |
| <b>Artikel-Nr.   item code</b> | <b>95045</b>   | <b>95031</b> | <b>95131</b> | <b>95132</b> | -            |
| L1                             | 220 mm         | 220 mm       | 220 mm       | 220 mm       | -            |
| L2                             | 6 mm           | 6 mm         | 6 mm         | 8 mm         | -            |
| <b>Artikel-Nr.   item code</b> | -              | <b>95197</b> | <b>95196</b> | <b>95204</b> | -            |
| L1                             | -              | 240 mm       | 240 mm       | 240 mm       | -            |
| L2                             | -              | 6 mm         | 6 mm         | 6 mm         | -            |


## Bipolare Pinzetten Standard

Bipolar forceps standard


- Für HF- und RF-Generatoren geeignet  
*Applicable for HF- and RF-generators*
- Hochwertige Isolation  
*Valuable insulation*
- Europäischer Flachstecker / Führungsstift  
*European flat plug / guiding pin*



CE 0483

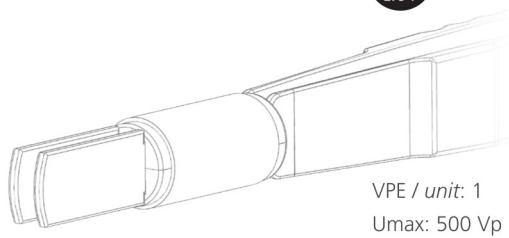

Spitzenlänge / Tip length = L2

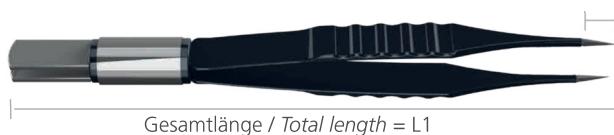

| Spitzenbreite   tip width | Nadel / Needle | 0.5 mm |
|---------------------------|----------------|--------|
|                           |                |        |
| Artikel-Nr.   item code   | 95019          | 95020  |
| L1                        | 110 mm         | 110 mm |
| L2                        | 6 mm           | 6 mm   |

Spitzenlänge / Tip length = L2



| Spitzenbreite   tip width | Nadel / Needle | 0.5 mm |
|---------------------------|----------------|--------|
|                           |                |        |
| Artikel-Nr.   item code   | 95023          | 95021  |
| L1                        | 110 mm         | 110 mm |
| L2                        | 6 mm           | 6 mm   |

## Bipolare Pinzetten Standard

Bipolar forceps standard


- Für HF- und RF-Generatoren geeignet  
Applicable for HF- and RF-generators

- Hochwertige Isolation  
Valuable insulation


- Europäischer Flachstecker / Führungsstift  
European flat plug / guiding pin



**CE** 0483

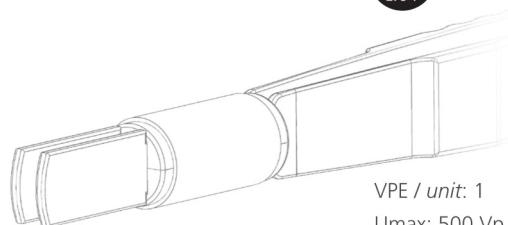

Spitzenlänge / Tip length = L2

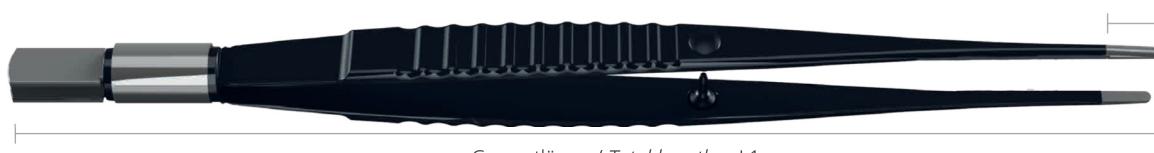

| Spitzenbreite   tip width      | Nadel / Needle | 0.5 mm       | 1.0 mm       | 2.0 mm       | 2.0 mm Karo  |
|--------------------------------|----------------|--------------|--------------|--------------|--------------|
| <b>Artikel-Nr.   item code</b> | -              | -            | <b>95038</b> | -            | -            |
| <b>L1</b>                      | -              | -            | 145 mm       | -            | -            |
| <b>L2</b>                      | -              | -            | 8 mm         | -            | -            |
| <b>Artikel-Nr.   item code</b> | <b>95011</b>   | <b>95170</b> | <b>95039</b> | <b>95027</b> | -            |
| <b>L1</b>                      | 165 mm         | 165 mm       | 165 mm       | 165 mm       | -            |
| <b>L2</b>                      | 6 mm           | 8 mm         | 8 mm         | 8 mm         | -            |
| <b>Artikel-Nr.   item code</b> | <b>95181</b>   | <b>95171</b> | <b>95180</b> | <b>95178</b> | -            |
| <b>L1</b>                      | 180 mm         | 180 mm       | 180 mm       | 180 mm       | -            |
| <b>L2</b>                      | 6 mm           | 8 mm         | 8 mm         | 8 mm         | -            |
| <b>Artikel-Nr.   item code</b> | <b>95112</b>   | <b>95037</b> | <b>95040</b> | <b>95029</b> | <b>95057</b> |
| <b>L1</b>                      | 195 mm         | 195 mm       | 195 mm       | 195 mm       | 195 mm       |
| <b>L2</b>                      | 8 mm           | 8 mm         | 8 mm         | 8 mm         | 8 mm         |
| <b>Artikel-Nr.   item code</b> | <b>95113</b>   | <b>95172</b> | <b>95041</b> | <b>95030</b> | -            |
| <b>L1</b>                      | 225 mm         | 225 mm       | 225 mm       | 225 mm       | -            |
| <b>L2</b>                      | 8 mm           | 8 mm         | 8 mm         | 8 mm         | -            |
| <b>Artikel-Nr.   item code</b> | -              | -            | -            | <b>95207</b> | -            |
| <b>L1</b>                      | -              | -            | -            | 260 mm       | -            |
| <b>L2</b>                      | -              | -            | -            | 8 mm         | -            |


## Bipolare Pinzetten Standard

Bipolar forceps standard

- Für HF- und RF-Generatoren geeignet  
*Applicable for HF- and RF-generators*
- Hochwertige Isolation  
*Valuable insulation*
- Europäischer Flachstecker / Führungsstift  
*European flat plug / guiding pin*



CE 0483

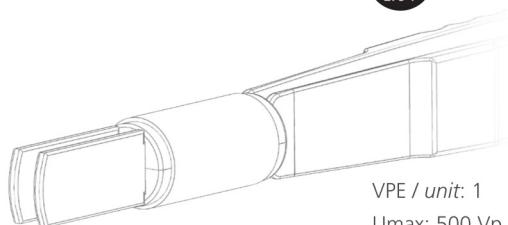

VPE / unit: 1  
Umax: 500 Vp

Spitzenlänge / Tip length = L2



Gesamtlänge / Total length = L1

| Spitzenbreite   tip width      | 1.0 mm       |
|--------------------------------|--------------|
|                                |              |
| <b>Artikel-Nr.   item code</b> | <b>95026</b> |
| L1                             | 195 mm       |
| L2                             | 6 mm         |
| <b>Artikel-Nr.   item code</b> | <b>95063</b> |
| L1                             | 220 mm       |
| L2                             | 6 mm         |
| <b>Artikel-Nr.   item code</b> | <b>95203</b> |
| L1                             | 240 mm       |
| L2                             | 6 mm         |

Spitzenlänge / Tip length = L2



Gesamtlänge / Total length = L1

| Spitzenbreite   tip width      | 1.0 mm       |
|--------------------------------|--------------|
|                                |              |
| <b>Artikel-Nr.   item code</b> | <b>95065</b> |
| L1                             | 195 mm       |
| L2                             | 6 mm         |
| <b>Artikel-Nr.   item code</b> | <b>95067</b> |
| L1                             | 220 mm       |
| L2                             | 6 mm         |
| <b>Artikel-Nr.   item code</b> | <b>95064</b> |
| L1                             | 240 mm       |
| L2                             | 6 mm         |